


# Side-By-Side plus Above-Below 'Multi' Combination Flashing (4 + Skylights/Windows)

When preparing to install skylights or roof windows in a multi combination it is vital that the rafters are spaced at correct centres. To calculate the rafter centres, simply add 100 mm to the width AND height of the skylight or roof window units being used.

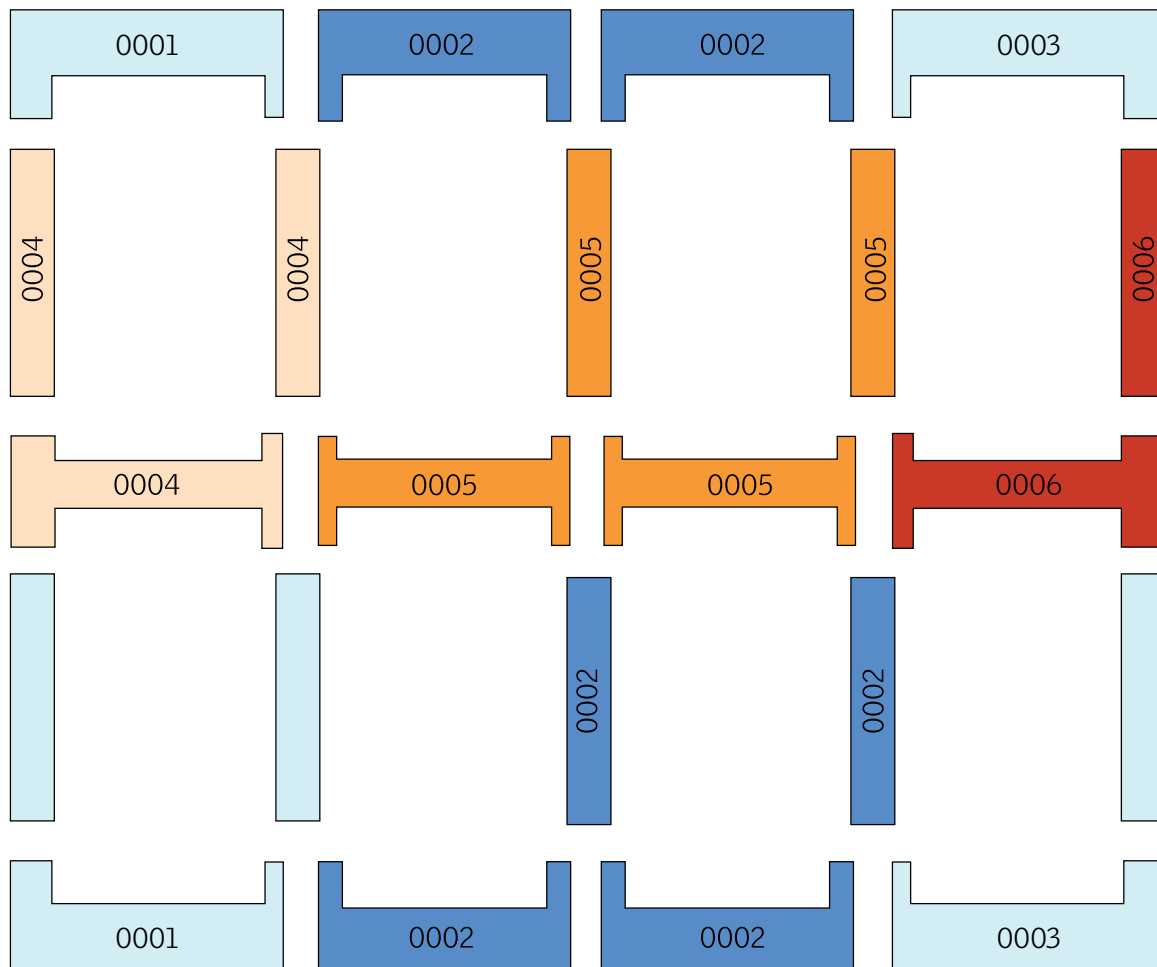

NB: Strict 100mm space between each skylight

## Side-By-Side configuration

Available for FS/VS/VSE/GGL/GPL

### 4 or more Skylights/Windows\*

EKW 0001 and EKW 0003 will always be the bottom left/right flashings.

EKW 0004 and EKW 0006 will always be the top left/right flashings.

EKW 0002 and EKX 0005 will always be top/bottom centre flashings.

## Combination of 8 Skylights/Windows\* below:

1 x EKW 0001 for bottom left hand skylight

2 x EKW 0002 for bottom centre skylights

1 x EKW 0003 for bottom right hand skylights

1 x EKW 0004 for top left hand skylight

2 x EKX 0005 for top centre skylights

1 x EKW 0006 for top right hand skylight.

\*GGL/GPL use EKW 0021 complete 'combi' kit (replaces EKW 0001 and EKW 0003).

NB: Above-Below configuration not possible for VSS skylights.