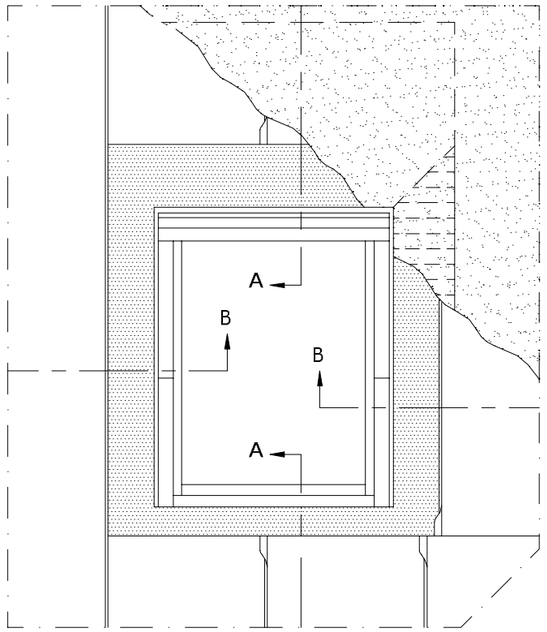

Sheer plan perpendicular to roof

1:2.5

Felt/breather membrane

VELUX VELUX EDE Gutter

VELUX underfelt collar BFX

Felt/breather membrane

Service area

Vapour barrier

200 mm

40 mm

25 mm

VELUX EDE Gutter

VELUX Products:

GGL 15°-90°

EDE 15°-90°

BFX

BDX 2000

LS-BBX

Roof covering:

Seamed metal sheet

Section A-A
1:5

1:2.5

Vapour barrier

TRIMMER where necessary

Taped joint with VELUX BBX tape

VELUX Vapour barrier BBX

VELUX EDE Front edge

1:2.5

VELUX underfelt collar BFX

Felt/breather membrane

20 mm

95 mm

30 mm

Gasket on BBX in window rebate

VELUX Insulation frame BDX 2000

VELUX Lining LS-

VELUX Vapour barrier BBX

TRIMMER where necessary

Roofing deck

Inner ventilation

Section B-B
1:5

VELUX EDE L-shaped side piece insertion

VELUX Underfelt collar BFX

Red level

Felt/breather membrane

Ventilation path

Gasket on BBX in window rebate

VELUX Insulation frame BDX 2000

20-30 mm

VELUX Vapour barrier BBX

VELUX Lining LS-

Rafter

Insulation

Vapour barrier

Note:
When installing VELUX Roof Windows, flashings and installation products, the manufacturers instructions and current building and fire regulations, where applicable, must be met.

© VELUX GROUP ® VELUX, VELUX logo are registered trademarks

VELUX®

VELUX A/S

Get more daylight Get more comfort Use less energy

VELUX Roof Window GGL installed in seamed metal sheet
VELUX insulation collar BDX 2000 incl. felt collar BFX
VELUX flashing EDE
VELUX lining LS- and vapour barrier collar BBX

Date 14.01.2013

All measurement in mm

File name EDE-VAS-109-0113

Drawing no. - -

SCo