



GGU Centre-pivot Roof Window

Main features

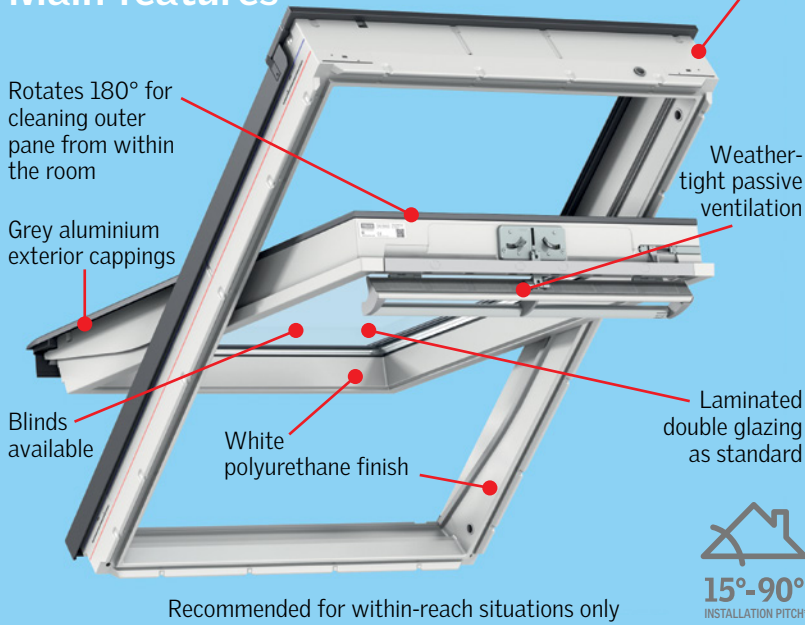

Construction


VELUX GGU is an opening, centre-pivoting roof window used for in-reach applications to bring natural light and air into attic or loft rooms where ventilation is required. Easy to clean, high quality polyurethane molded over a timber core and finished in white. Aluminium external cappings finished in a smooth grey colour, similar to 'COLORSTEEL® Grey Friars'.



Operation

The GGU is operated manually. The control bar at the top of the window is clicked to allow passive ventilation, whilst the window remains locked and watertight. A second click of the control bar opens the sash. The sash is frictioned to stay in a horizontal pivot position to maximise ventilation. The sash can be locked in two positions, either slightly ajar or 180°, the fully rotated position, allows the outside pane to be cleaned safely from inside the room.

Laminated Double Glazing as standard

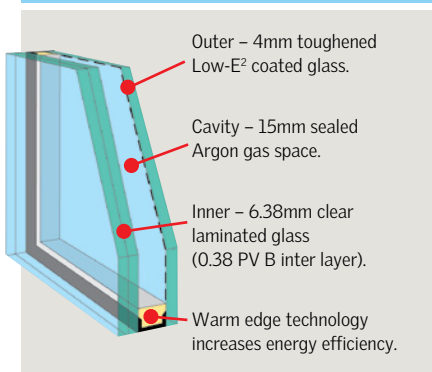

Benefits:

- Radiant heat block: Complete window **approx 70%**
Glass only **approx 70%**
- Harmful UV rays block **approx 95%**
- WERS rating **5 stars**
- Low-E² coating. ✓

New Zealand Standard 4223.4

Laminated glass (standard) must be used for roof windows installed 5m or more above floor level.

* For roofs below 15° pitch, roof windows need to be raised to at least 15° and custom flashed. (Not supplied by VELUX). Refer to website or contact VELUX for technical advice and drawings.

GGU technical performance

CodeMark® is a voluntary scheme owned by the Ministry of Business, Innovation & Employment that provides an easily understood and robust way to show a building product, design or method meets the requirements of the New Zealand Building Code. CodeMark is unchallengeable and has legal status equivalent to that of an Acceptable Solution or Verification Method.



New Zealand Standards

VELUX Roof Windows are tested and appraised to the appropriate New Zealand Standards.

NZS4223 NZS3604 NZS1170

Energy rating


GGU Roof Windows have been energy rated in accordance with the Roof Window Energy Rating Scheme (WERS).

★★★★★ Maximum 5 stars Summer Ratings

4.5 out of 5 stars for Winter Rating.
4.5 out of 5 stars for Cool Daylight in Summer.

Construction

Frame and sash: Moulded Polyurethane (white) encapsulating a timber core.
Exterior capping: Grey aluminium.



PASSIVE VENT-For controllable passive ventilation when you want it.

Technical Values

R-value[‡]	
Complete Roof Window	0.77
Solar Heat Gain Co-efficient[‡]	
Complete Roof Window	0.30
Visible Light Transmittance	
Complete Roof Window	0.64
Luminous Efficacy (Ke = VT/SHGC)	
Complete Roof Window	2.07
Acoustic performance	
Complete skylight	34dB#

#Based on STC value tested to AS1276.1.

WORLD-CLASS QUALITY



LOAD TESTED (NZBC Clause B1)



DURABILITY (NZBC Clause B2)



WEATHERTIGHTNESS (NZBC Clause E2)



SAFETY GLAZING (NZBC Clause F2)



ENERGY EFFICIENCY (NZBC Clause H1)



VENTILATION (NZBC Clause G4)



NATURAL LIGHT (NZBC Clause G7)

NB: CodeMark certification and BRANZ appraisal scope does not cover installations over 60°.

GGU Centre-pivot Roof Window

Manual Blackout Blind (DKL)



- Provides near total light reduction.
- Colour: White rails and internal fabric, silver coating on external fabric face.
- Materials: Light-tight polyester with heat resistant coating. White powder-coated aluminium side channels and top cover.
- Reduce heat by approx 40%^.
- Increased thermal efficiency.
- Unique installation system allows easy installation.

Blinds sold separately.

NB: NEW VELUX blinds and flashings do not suit roof windows purchased prior to March 2014.

Choice of flashing

EDW flashing



EDW flashing is used for roof windows installed into tiled roofs and profiled metal roofs (such as corrugated iron - not suitable for concealed clip roof profiles or membrane roofs).



EDL flashing



EDL flashing is used for roof windows installed into slate or shingle roofs – max 5mm thick. 'L' shaped sections are provided that act as soaker pieces on either side of the roof window. These soakers sit under each course of slate or shingle and interlock with the course above.



EKW combination flashing



Designed for installing multiple roof windows side-by-side or above-below.

Roof windows must be spaced 100mm apart. EKW suitable for same roofs as EDW flashing.










* For roofs below 15° pitch, roof windows need to be raised to at least 15° and custom flashed. (Not supplied by VELUX). Refer to website or contact VELUX for technical advice and drawings.

Opening Restrictions

Building regulations may require the use of a restrictor device: contact VELUX for

information relating to restrictor devices for within-reach roof windows.

GGU – frame and glazing dimensions

							
Product/size code ▶	CK02	CK04	MK04	MK06	MK08	SK06	SK08
External frame dimensions mm (wxh)	550x780	550x980	780x980	780x1180	780x1400	1140x1180	1140x1400
Internal glass size mm (wxh)	371x583	371x783	601x783	601x983	601x1203	961x983	961x1203
Daylight area (m ²)	0.22	0.29	0.47	0.59	0.72	0.95	1.16
Ventilation with open sash (m ²)	0.29	0.38	0.58	0.72	0.86	1.10	1.32
Weight (kg) including flashing	24.9	29.2	37.8	40.9	47.7	56.7	64.9
Weight (kg) excluding flashing	21.0	25.1	33.2	35.9	42.5	50.9	58.8

^ Based on VELUX internal testing with 3076 model Roof Window.