

JET continuous rooflight fall-through protections type LB-DSL and LB-SR

VELUX®
Commercial


Greater safety for installation and maintenance work on the roof
After installation is complete, no more safety nets required

JET continuous rooflight fall-through protection type LB-DSL

- galvanised steel safety net to be fitted during continuous rooflight assembly
- intricate structure with appealing design ensures high daylight penetration level
- retrofitting (third-party kerbs on request) possible (makes sense e.g. when replacing the glazing)
- for JET continuous rooflight order widths 1,200 to 6,200 mm
- complete fall-through protection underneath the continuous rooflight in the flap area
- patent pending
- "fall-through protection" according to GS-BAU-18:2015-02 with DGUV test certificate



Type LB-DSL

JET continuous rooflight fall-through protection type LB-SR

- steel pipe with cross bar to be fitted during continuous rooflight assembly
- suitable for retrofitting (third-party kerbs on request)
- for JET continuous rooflight order widths 1,700 to 2,700 mm
- for complete fall-through protection underneath the continuous rooflight incl. flaps
- "fall-through protection" according to GS-BAU-18:2015-02 with DGUV test certificate



Type LB-SR



Note:

The JET continuous rooflight fall-through protections with permanent, collective protective effect for the creation of traffic route protection on roofs, tested in accordance with GS-BAU-18 certificates of the professional association to implement applicable standards and regulations (e.g. DIN 4426:2017-01, ASR A2.1, DGUV Regulation 38 and DGUV Regulation 101-016).

Area of application and order widths

JET continuous rooflight fall-through protection type LB-DSL

- galvanised safety net with mesh width of 90 x 100 mm for direct installation while installing continuous rooflight
- attachment using retaining brackets at the kerb head
- for continuous rooflight order widths 1,200 to 6,200 mm
- can be used with all types of JET steel kerb and on-site wooden kerbs
- retrofittable with JET structures when renovating a continuous rooflight
- patent pending connection technology

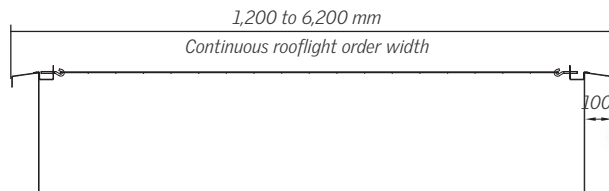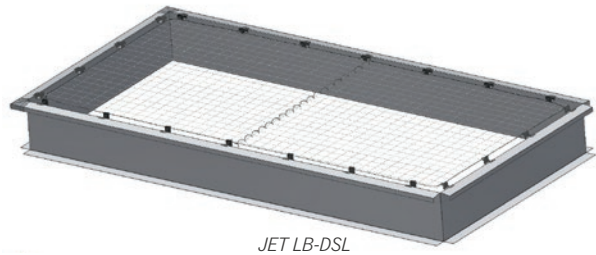

JET continuous rooflight fall-through protection type LB-SR

- steel pipe with cross beam to be fitted directly during continuous rooflight assembly
- attachment with aluminium profiles to the continuous rooflight kerb
- for continuous rooflight order widths 1,700 to 2,700 mm
- can be used with JET steel kerb types with 100 mm kerb support
- retrofittable to JET structures (when using third-party structures, special certification management is necessary)

