

Continuous rooflight fall-through protections type LB-DSL and LB-SR

VELUX®
Commercial


More safety for installation and maintenance work on the roof
After installation is complete, no safety nets are required any more

Continuous rooflight fall-through protection type LB-DSL

- galvanised steel safety net to install while installing the continuous rooflight
- filigree structure with aesthetic appearance ensures high level of ambient daylight
- retrofitting (third-party kerb systems upon request) possible (appropriate e.g. when replacing the glazing)
- for continuous rooflight order widths 1200 to 6200mm
- complete "fall-through protection" underneath the continuous rooflight in the flap area
- patent pending
- "fall-through protection" according to GS-BAU-18:2015-02 with DGUV test certificate



Type LB-DSL

Continuous rooflight fall-through protection type LB-SR

- steel tube with cross bar to install while installing the continuous rooflight
- suitable for retrofitting (third-party kerb systems upon request)
- for continuous rooflight order widths 1700 to 2700mm
- for "fall-through protection" underneath the continuous rooflight incl. flaps
- "fall-through protection" according to GS-BAU-18:2015-02 with DGUV test certificate



Type LB-SR

Note:

The continuous rooflight fall-through protections with permanent, fully effective protection to enable traffic route safety on roofs, tested in accordance with GS-BAU-18 certificates of the professional association to implement applicable standards and regulations (e.g. DIN 4426:2017-01, ASR A2.1, DGUV Regulation 38 and DGUV Regulation 201-054).

2.1.1
VARIO-THERM


2.1.2
VARIO-NORM

2.1.3
VARIO-THERM S


Area of application and order widths

Continuous rooflight fall-through protection type LB-DSL

- galvanised safety net with mesh width of 90 x 100mm for direct installation while installing continuous rooflight
- attachment using retaining brackets at the kerb head
- for continuous rooflight order widths 1200 to 6200mm
- can be used with steel kerb system and on-site wooden kerbs
- retrofittable with structures when renovating a continuous rooflight
- patent pending connection technology

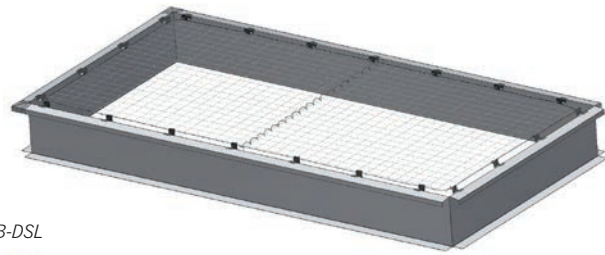

LB-DSL

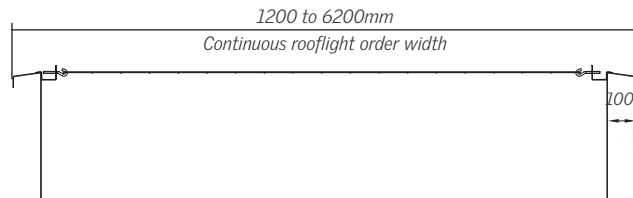

Continuous rooflight fall-through protection type LB-SR

- steel tube with cross beam for direct installation and also suitable for retrofitting
- attachment to the continuous rooflight kerb system with aluminium profiles
- for continuous rooflight order widths 1700 to 2700mm
- can be used with steel kerb system with 100mm bearing surface
- retrofittable to structures (when using third-party structures, special assessment is required)

