



Doorsnede A-A  
1:5

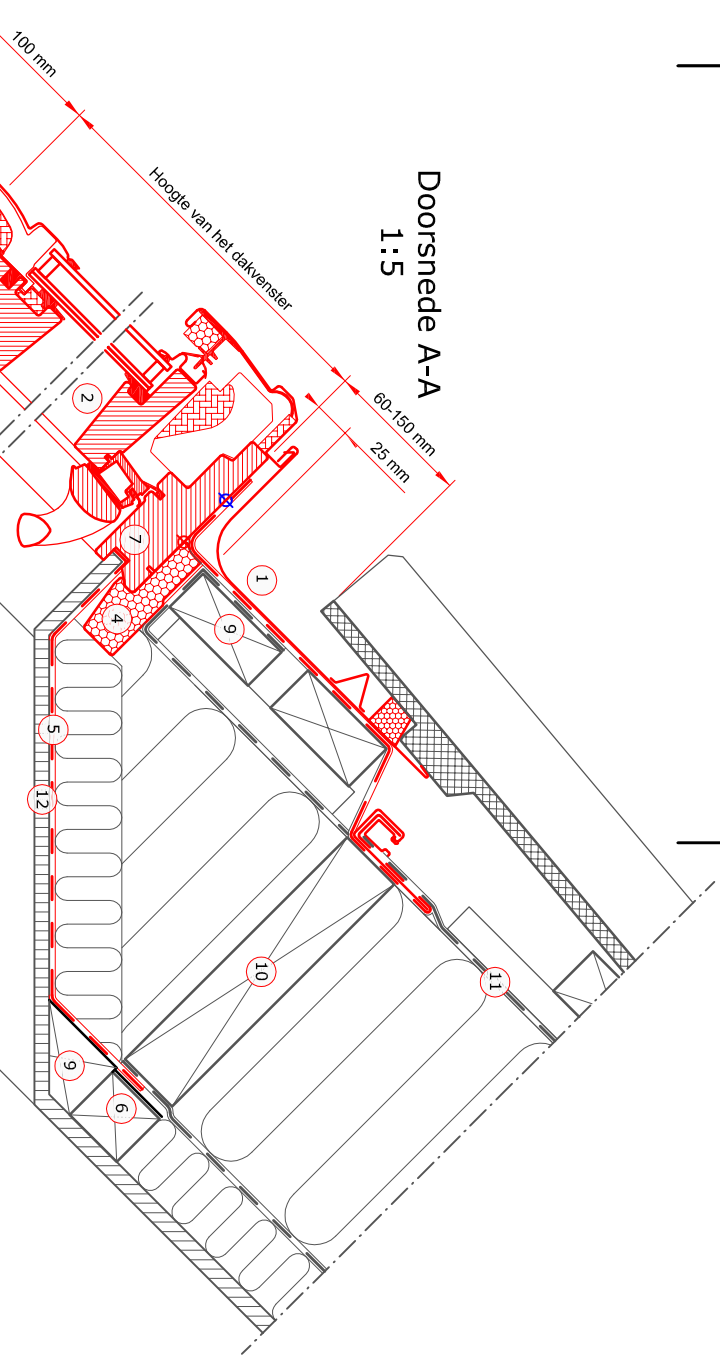

Doorsnede B-B  
1:5

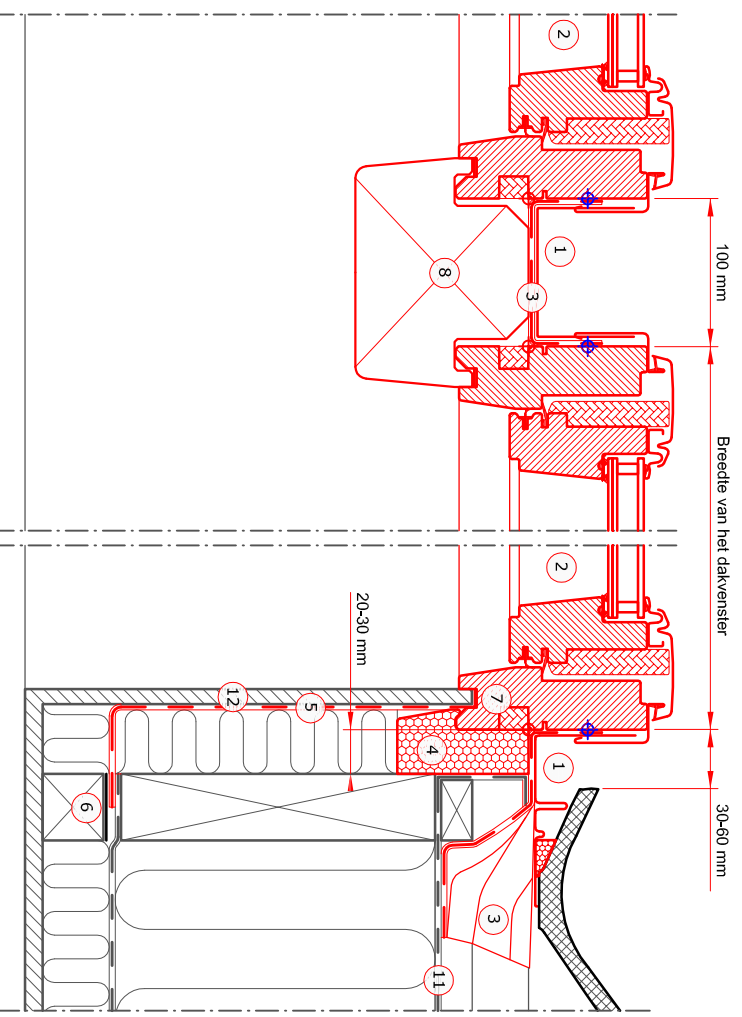

- 1 VELUX Gootstuk (EKW 15°-90°)
- 2 VELUX Dakvenster (GGL 15°-90°)
- 3 VELUX Onderdakraag (BFX)
- 4 VELUX Isolierend kader (BDX)
- 5 VELUX Dampscherm (BBX)
- 6 VELUX Plakband (BBX)
- 7 Dichting in de groef van het dakvenster
- 8 VELUX Hulpkeper (EKY 15°-90°)
- 9 Panlat (Niet VELUX)
- 10 Hulpkeper (Niet VELUX)
- 11 Onderdak (Niet VELUX)
- 12 Binnenwerking (Niet VELUX)

Dakbekleding :  
Pannen :  
max 120 mm

VELUX Producten :

- GGL 15°-90°
- EKW 1 15°-90°
- EKW 4 15°-90°
- BFX
- BBX
- EKW 2 15°-90°
- EKW 6 15°-90°
- BDX
- EKY 15°-90°

Maaten:

Maat	Breedte (mm)	Maat	Hoogte (mm)
BK--	472	-K02	778
CK--	550	-K04	978
FK--	660	-K06	1178
MK--	780	-K08	1398
PK--	942	-K10	1600
SK--	1140	-K12	1800
UK--	1340		

© VELUX GROUP    VELUX, VELUX logo are registered trademarks

File name: DRAWING 02.05 EKW - NL

Drawing no.: 02.05 VB-0716    SCO: V-B

Create date:	Rev. date:	Format:	Scale:
28.05.2014	07.07.2016	A3	1:5

Note: When installing VELUX Roof Windows, flashings and installation products, the manufacturers' instructions and current building and fire regulations, where applicable, must be met.